


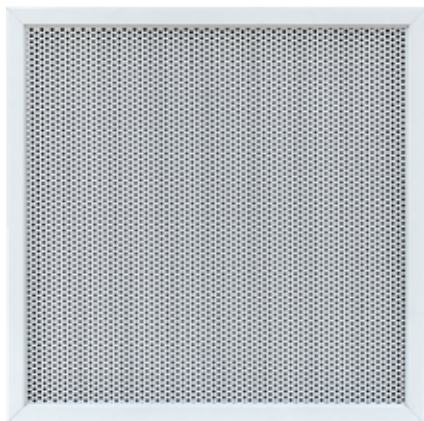

BQFC60

Caratteristiche: diffusori quadri forellinati con cornice.

Costruzione: telaio in alluminio, lamiera forata in acciaio verniciato bianco RAL 9016 opaco.

Impiego: a soffitto, in mandata e ripresa. Altezza di installazione: 2,5-4,0 m.

Fissaggio: clips (con fori per viti a richiesta).

Accessori:

- Plenum in acciaio zincato:
 - Con o senza isolamento.
 - Con o senza equalizzatore.
- Serranda di taratura in acciaio zincato con alette a funzionamento contrapposto.

Characteristics: perforated panel diffusers with frame.

Finishing: frame in aluminium, perforated sheet steel painted white RAL 9016 matt.

Utilization: for ceiling installation and for air intake and delivery. Installation height: 2,5-4,0 m.

Fixing: clips (through hole on request).

Accessories:

- Galvanized steel plenum:
 - With or without insulation.
 - With or without equalizer sheet.
- Calibration damper made of galvanized steel and opposed blades.


MODELLI | MODELS

BQFC60R Ripresa / no deflettori | Return / no deflectors

BQFC60M Mandata / deflettori | Supply / deflectors



DISEGNI | DRAWINGS

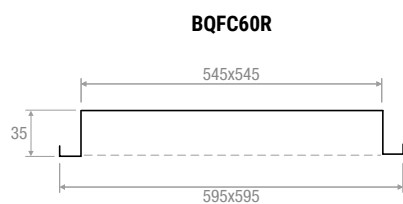

PLENUM | PLENUM


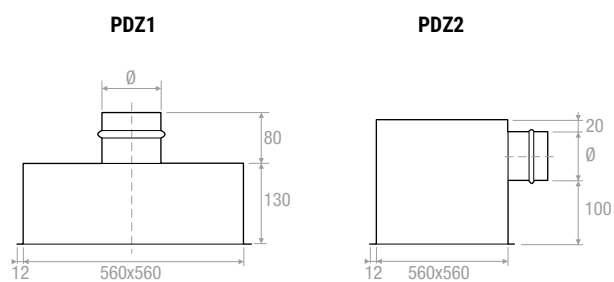


TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,25)}-Y_{(0,25)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQFC60R	0,1398	540	1200	< 20	31	-	-	10	50

BQFC60

DISEGNI | DRAWINGS

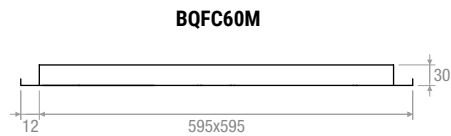

CONFIGURAZIONI FLUSSI ARIA | AIR FLOW DIRECTIONS

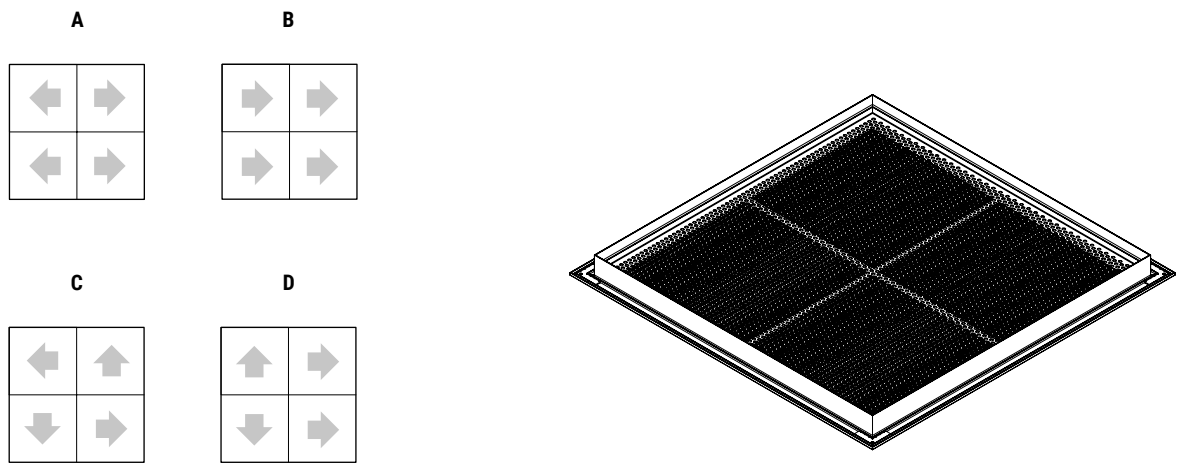




TABELLA DI SELEZIONE | SELECTION TABLE

Modello Model	Q [m³/h]		L _{WA} [dB(A)]		X _(0,20) [m]		Dp _i [Pa]	
	min	max	min	max	min	max	min	max
BQFC60M 160	180	410	-	48	1,1	3,4	10	50
BQFC60M 200	240	540	-	46	1,6	5,1	10	50
BQFC60M 250	320	720	-	44	2,4	7,7	10	50
BQFC60M 315	430	970	-	43	3,7	11,8	10	50



VERSIONI DISPONIBILI | VERSIONS AVAILABLE

RIPRESA | RETURN

						
BxH	Ø	D	BQFC60R	SC	PDZ1	PDZ2
mm	mm	mm				
595x595 esterno cornice overall size	248	595				

MANDATA | SUPPLY

								
	Ø	D	BQFC60M	SC	PDZ1	PDZ11	PDZ2	PDZ12
	mm	mm						
BQFC60M 160	158	595						
BQFC60M 200	198	595						
BQFC60M 250	248	595						
BQFC60M 315	313	595						