



GRA60SMF

Caratteristiche: griglia di ripresa portafiltro 595x595 mm ad alette fisse inclinate di 45° per l'alloggiamento e la sostituzione del filtro.

Costruzione: alluminio anodizzato.

Impiego: a parete/soffitto in ripresa.

Fissaggio: con clips (con viti a richiesta obbligatorio per installazione a soffitto).

Chiusura: con push/pull.

Accessori:

- Plenum in acciaio zincato con o senza isolamento.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.
- Controtelaio di montaggio in lamiera di acciaio zincata.

Characteristics: return filter grille 595x595 mm (bars inclined 45°). Removable core for filter insertion and replacement.

Finishing: anodized aluminium.

Utilization: for wale/ceiling installation and for air intake.

Fixing: by clips (with screws on request mandatory for ceiling installation).

Closing: by push/pull.

Accessories:

- Galvanized steel plenum box with or without insulation.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.

MODELLI | MODELS

GRA60SMF Griglia di ripresa portafiltro 595x595 mm ad alette fisse di 45° con filtro incluso
Return filter grille 595x595 mm (bars inclined 45°) with filter


GRA60SM Griglia di ripresa portafiltro ad alette fisse di 45° senza filtro
Return filter grille (bars inclined 45°) without filter

VERNICIATURA | PAINTING

Colori RAL 9016 opaco, RAL 9010 lucido: + 15% - Altri colori RAL: prezzi a richiesta
Color RAL 9016 matt, RAL 9010 glossy: + 15% - Different RAL colors: prices on request



DISEGNI | DRAWINGS

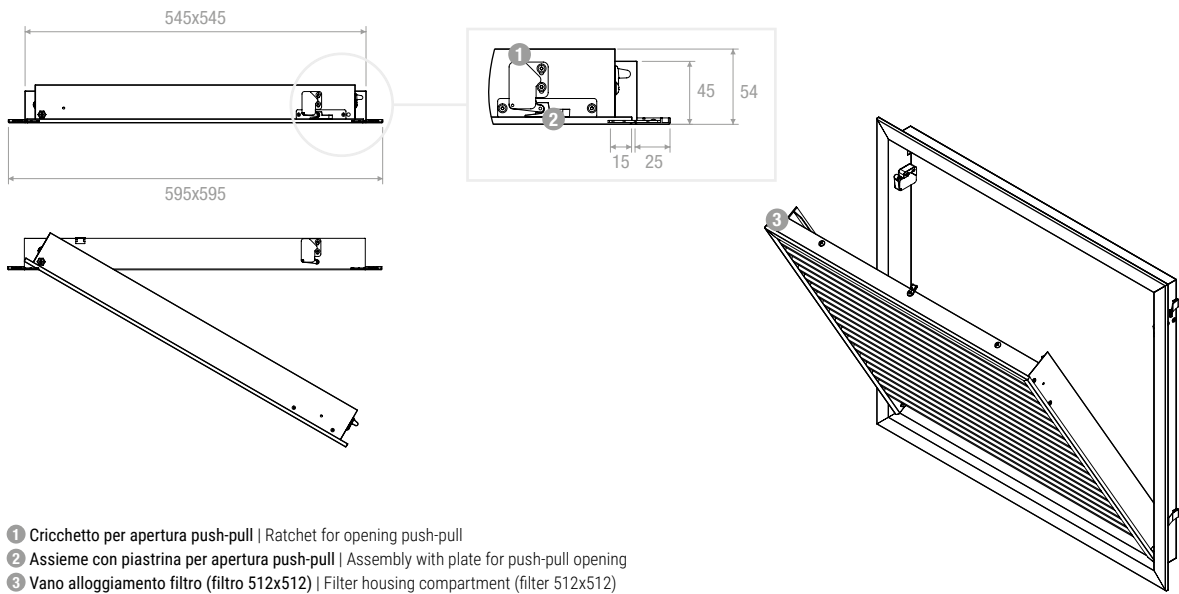

PLENUM | PLENUM

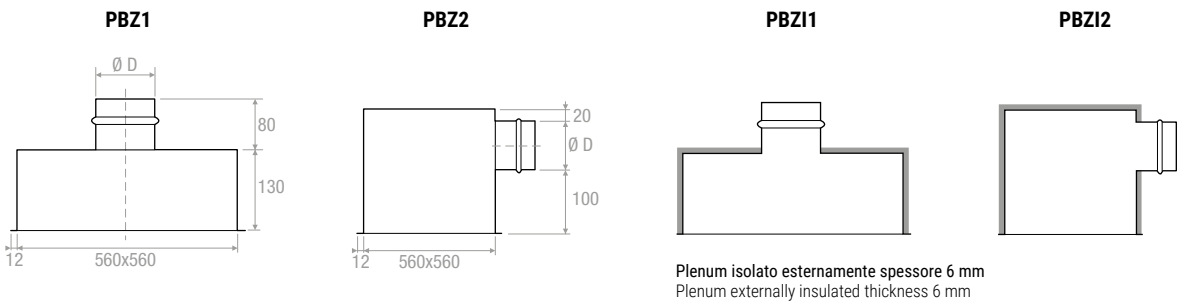


TABELLA DI SELEZIONE | SELECTION TABLE

Modello Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		Dp_t [Pa]	
		min	max	min	max	min	max
GRA60SM	0,1957	910	2230	24	41	5	30
GRA60SMF	0,1957	510	1760	-	34	10	50

VERSIONI DISPONIBILI | VERSIONS AVAILABLE

stock

BxH mm	Con filtro With filter	Filtro Filter Eff. G2	SCSM	PBZ1	PBZ11	PBZ2	PBZ12
595x595							