




MDF25L

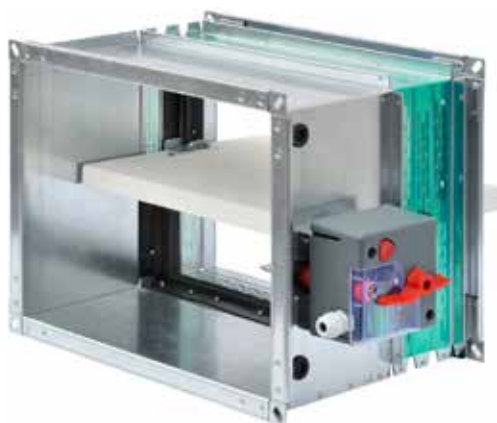

Caratteristiche: serrande tagliafuoco marchiate CE certificate UNI EN 15650, classificate secondo UNI EN 13501-3 e testate secondo UNI EN 1366/2. Installabili su condotte di aerazione garantiscono una rapida interruzione del flusso d'aria in caso di incendio. Attuato con elettromagnete o fusibile termico a riarmo meccanico.

Costruzione: involucro in acciaio zincato con taglio termico intermedio. Pala in calcio-silicato movimentata su perni di rotazione in acciaio alloggiati su boccole in ottone. Provviste di flangia esterna per connessione ai condotti e dispositivo di sgancio termico tarato di serie a 72 °C.

Condizioni operative: aria pulita, velocità massima 10 m/s.

Characteristics: fire dampers marked CE certified UNI EN 15650, UNI EN 13501-3 classified and tested according to UNI EN 1366/2. Installable on ventilation ducts ensure a rapid interruption of the air flow in case of fire. Moved with electromagnet or manual reset thermal fuse.

Finishing: casing in galvanized steel with intermediate thermal cut. Blade in calcium silicate moved on pivots steel rotation housed on brass bushings. Provided with outer flange for connection to ducts have thermal release device calibrated standard at 72 °C.

Operating conditions: clean air, maximum air speed 10 m/s.

DISEGNI | DRAWINGS

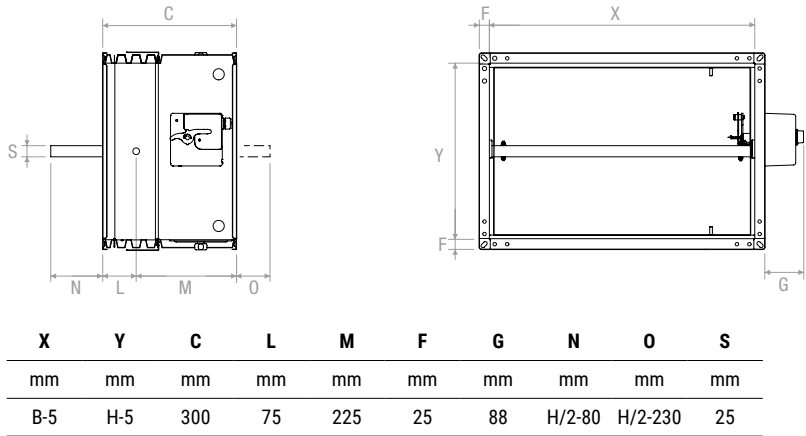


TABELLA PRESTAZIONI | PERFORMANCE TABLE

Serrande tagliafuoco testate secondo EN 1366-2 e classificate secondo EN 13501-3
Fire dampers tested according EN 1366/2 and classified according to EN 13501-3

Classificazioni di resistenza Classification of resistance		
	EI 120 S - 500 Pa	EI 90 S - 500 Pa
Muratura in calcestruzzo cellulare aerato spessore 100 mm Aerated concrete wall thickness 100 mm (v _e i ↔ o)	da 100x200 a 800x600 from 100x200 to 800x600	da 100x200 a 800x600 from 100x200 to 800x600
Solaio in calcestruzzo cellulare aerato spessore 150 mm Aerated concrete slab thickness 150 mm (h _o i ↔ o)	da 100x200 a 800x600 from 100x200 to 800x600	da 100x200 a 800x600 from 100x200 to 800x600
Lastre in cartongesso tipo F spessore 100 mm * Gypsum plasterboards type F wall thickness 100 mm * (v _e i ↔ o)	da 100x200 a 800x600 from 100x200 to 800x600	da 100x200 a 800x600 from 100x200 to 800x600
Lastre di cartongesso tipo F spessore 100 mm Gypsum plasterboards type F wall thickness 100 mm (v _e i ↔ o)	-	da 100x200 a 800x600 from 100x200 to 800x600

* Necessario utilizzo termoespandente LFC | Need to use thermo expanding gasket model LFC

LEGENDA | LEGEND
ve = installazione verticale - vertical installation
ho = installazione orizzontale - horizontal installation
i ↔ o = lato esposto al fuoco indifferente - side exposed to fire indifferent
Pa = Pascal - Pascal
E = integrità - entirety
I = isolamento termico - thermal insulation
S = tenuta ai fumi - smoke seal

MDF25L

VERSIONI DISPONIBILI | VERSIONS AVAILABLE

CON COMANDO MECCANICO E PREDISPOSIZIONE PER ELETTROMAGNETE
WITH MECHANICAL CONTROL AND PREDISPOSITION FOR ELECTROMAGNET

H	B mm							
	100	150	200	250	300	350	400	450
mm								
200								
250								
300								
350								
400								
450								
500								
550								
600								

H	B mm						
	500	550	600	650	700	750	800
mm							
200							
250							
300							
350							
400							
450							
500							
550							
600							

ACCESSORI | ACCESSORIES

	Modello Model	Descrizione Description
	FS3172	Termofusibile meccanico in rame 72°C Mechanical thermofuse in copper 72°C
	FS31100	Termofusibile meccanico in rame 95°C Mechanical thermofuse in copper 95°C
	ME33	Elettromagnete con alimentazione 220V AC normalmente eccitato Electromagnet, main voltage 220V AC normally excited
	MD34	Elettromagnete con alimentazione 220V AC normalmente diseccitato Electromagnet, main voltage 220V AC normally not excited
	ME35	Elettromagnete con alimentazione 24V DC normalmente eccitato Electromagnet, main voltage 24V DC normally excited
	MD36	Elettromagnete con alimentazione 24V DC normalmente diseccitato Electromagnet, main voltage 24V DC normally not excited
	LFC	Guarnizione termoespandente (rotolo 2,15m prezzo al m) Thermo expanding gasket (2,15m roll price per m)