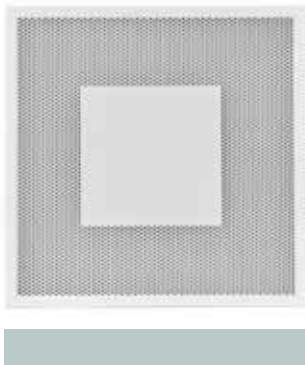


**CARACTERISTICI:**

Difuzor pătrat cu perforații, cu miez central 595x595 mm dimensiuni gabarit.

CONSTRUCȚIE:

Cadru din AluminIU, panou perforat din oțel vopsit alb RAL 9010.

UTILIZARE:

Pentru montaj la plafon și evacuare aer: (BQF-SM) pentru introducere: (BQF-SMF). Înălțime montaj: 2,5-4,0 m.

MONTAJ:

Clipsuri (șuruburi frontale la cerere).

ACCESORII:

- Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată.
- Registru de reglaj executat din oțel galvanizat cu lamele opuse.
- Deflectori pentru orientare jet aer.

CHARACTERISTICS:

Perforated face square diffusers with central plug, 595x595 mm overall size.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010

UTILIZATION:

For ceiling installation and for air intake (BQF-SM) and delivery (BQF-SMF). Installation height: 2,5-4,0 m.

FIXING:

Clips (frontal screws on request).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Deflectors for throw orientation.

PREȚURI - PRICES

■ STOC

	Introducere - Supply BQCM Cu deflectori With deflectors	Evacuare - Return BQCR Cu deflectori Without deflectors	SC	PDZ1	PDZ11	PDZ2	PDZ12
	€	€	€	€	€	€	€
595x595 dimensiuni gabarit overall size							

DESCRIERE: - DESCRIPTION:

BQCM: Difuzor pătrat cu perforații cu panou central, ramă și deflectoare din aluminIU. - Perforated face square diffuser with central plug with aluminium frame and deflectors.


BQCR: Difuzor pătrat cu perforații cu panou central, ramă din aluminIU fără deflectoare. - Perforated face square diffuser with central plug with aluminium frame and without deflectors.

BQCM 595x595 (Cu deflectori - with deflectors)			
NR	Q debit airflow	P pierdere de presiune pressure drop	V viteză aer air velocity
20	430	7	1,2
30	660	17	1,8
40	1000	38	2,8

Înălțime montaj 2.5 ÷ 3.5 m.
Installation height 2.5 ÷ 3.5 m.


BQCR 595x595 (Fără deflectori - without deflectors)			
NR	Q debit airflow	P pierdere de presiune pressure drop	V viteză aer air velocity
20	1250	7	1,5
30	1800	16	2,4
40	2600	35	3,8

Înălțime montaj: 2.5 ÷ 3.5 m.
Installation height 2.5 ÷ 3.5 m.

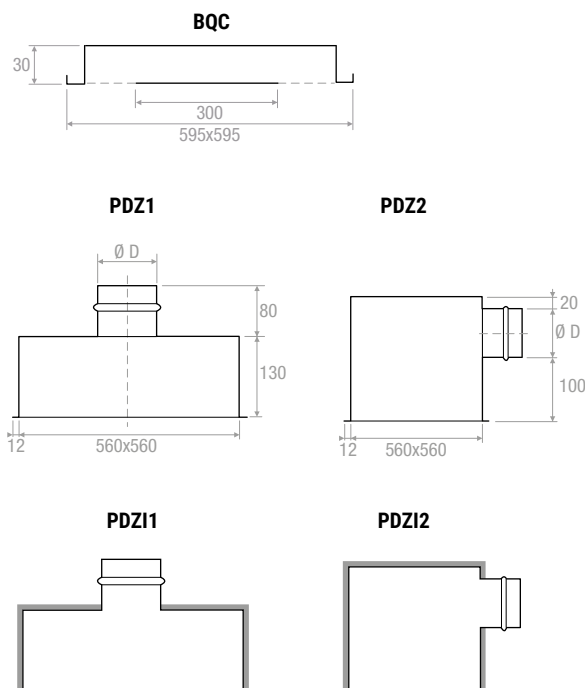DESENE - DRAWINGS

Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMĂ SELECȚIE RAPIDĂ - QUICK SELECTION DIAGRAM

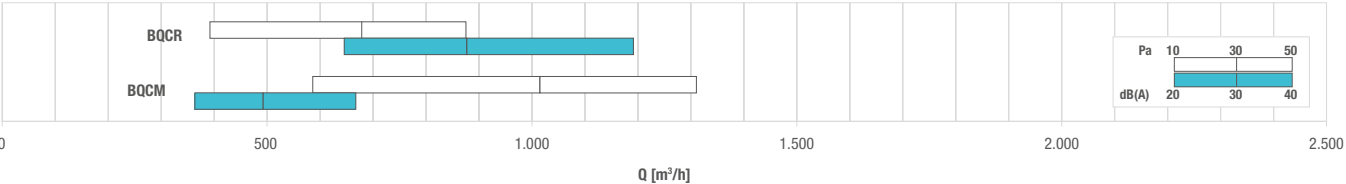

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A _s [m²]	Q [m³/h]		L _{wa} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQCM	0,1044	590	1310	36	62	1,8	4,0	10	50
BQCR	0,1044	390	880	< 20	30	-	-	10	50