


BQF



CARACTERISTICI:

Grile evacuare cu placă perforată.

CONSTRUCȚIE:

Rama din Aluminu vopsit alb RAL 9010. Panou din oțel vopsit alb RAL 9010.

UTILIZARE:

Montaj în perete, pentru evacuare aer.

MONTAJ:

Prin clipsuri sau șurub frontal (la cerere)

ACCESORII:

- Plenum din oțel galvanizat, standard sau izolat termic.
- Registru de reglaj executat din oțel galvanizat cu lamele opuse.
- Contracadrul de montaj executat din oțel galvanizat.

CHARACTERISTICS:

Perforated face return grilles.

CONSTRUCTION:

Frame made of RAL 9010 white painted aluminium. Panel made of RAL 9010 white painted steel.

UTILIZATION:

For wall installation and for air intake.

FIXING:

Fixing by using clips or frontal screws on demand.

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.

PREȚURI - PRICES

BxH	BQF	SC	CT	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€
300x300							
400x300							
500x300							
600x300							
800x300							
1000x300							
400x400							
500x400							
600x400							
800x400							
1000x400							
500x500							
600x500							
800x500							
1000x500							
600x600							
800x600							
1000x600							


ACCESORII - ACCESSORIES

SC: Registru reglaj cu lamele opuse - Opposed blade damper

CT: Contracadre executate din profil de oțel galvanizat - Counterframes in galvanised steel sheet profile section


PBZ: Plenum de racord - Connecting plenum

DESENE - DRAWINGS

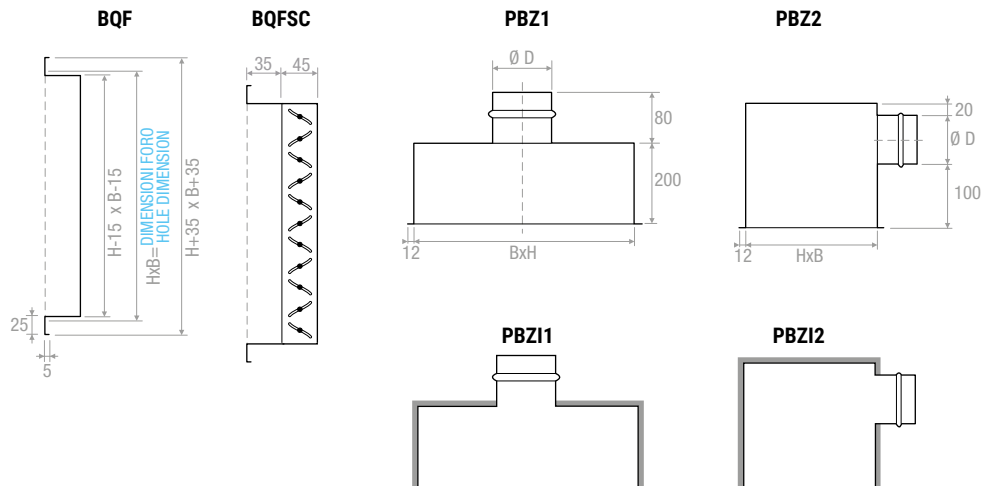

Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMĂ SELECȚIE RAPIDĂ - QUICK SELECTION DIAGRAM

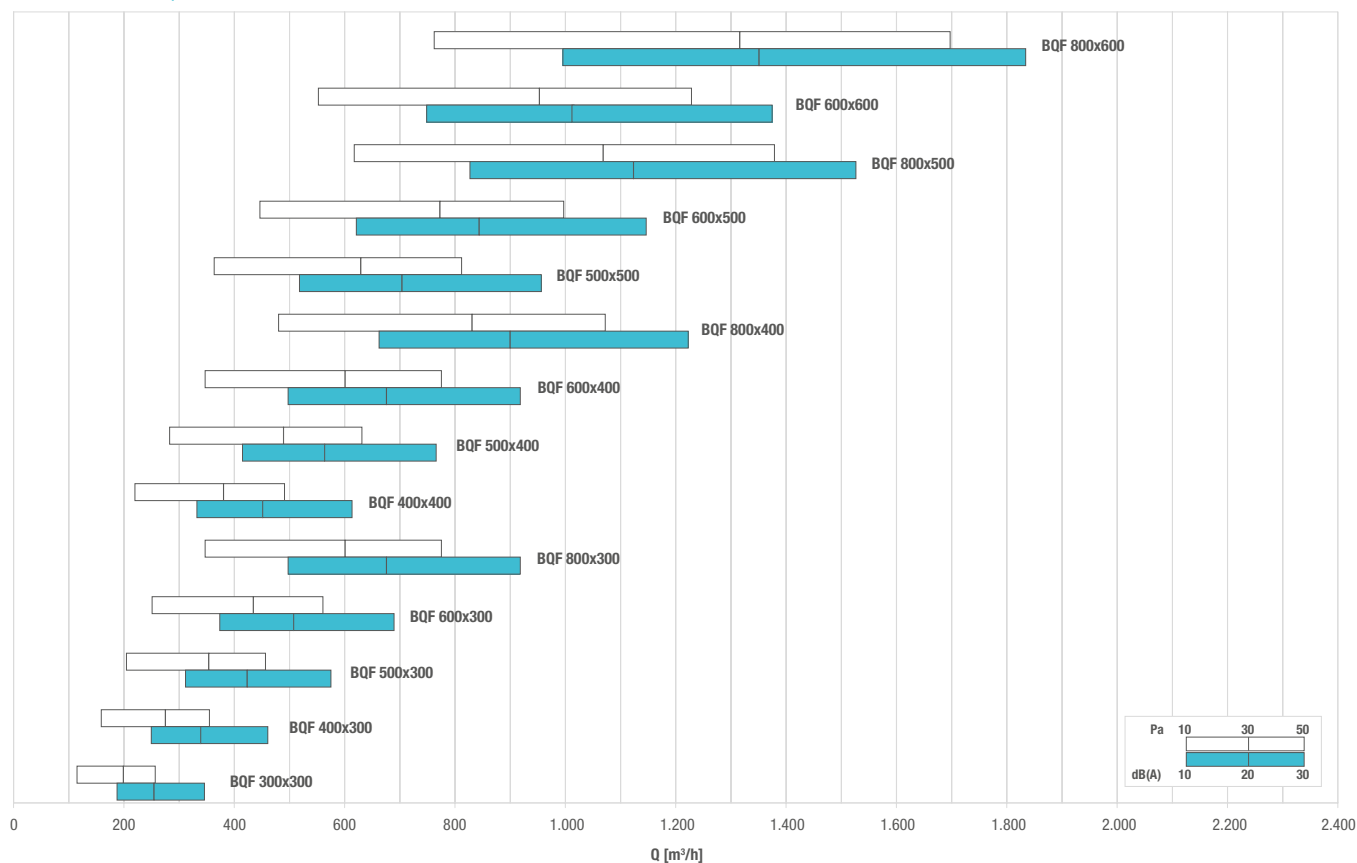

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A_k [m²]	Q [m³/h]		L_{wa} [dB(A)]		Dp_t [Pa]	
		min	max	min	max	min	max
BQF 300x300	0,0305	120	260	-	21	10	50
BQF 400x300	0,0422	160	360	-	22	10	50
BQF 500x300	0,0543	200	460	-	23	10	50
BQF 600x300	0,0668	250	560	-	23	10	50
BQF 800x300	0,0924	350	780	-	25	10	50
BQF 1000x300	0,1190	450	1000	-	26	10	50
BQF 400x400	0,0584	220	490	-	23	10	50
BQF 500x400	0,0752	280	630	-	24	10	50
BQF 600x400	0,0924	350	780	-	25	10	50
BQF 800x400	0,1280	480	1070	-	26	10	50
BQF 1000x400	0,1647	620	1380	-	27	10	50
BQF 500x500	0,0968	360	810	-	25	10	50
BQF 600x500	0,1190	450	1000	-	26	10	50
BQF 800x500	0,1647	620	1380	-	27	10	50
BQF 1000x500	0,2120	790	1770	-	28	10	50
BQF 600x600	0,1462	550	1220	-	26	10	50
BQF 800x600	0,2025	760	1690	-	27	10	50
BQF 1000x600	0,2606	980	2180	-	28	10	50