


BQF60SMF



PREȚURI - PRICES

STOC

	BQF60SMF Cu filtru With filter	BQF60SM	Filtru - Filter	SC	PDZ1	PDZI1	PDZ2	PDZI2
	€	€	€	€	€	€	€	€
595x595 dimensiuni gabarit overall size								

DESCRIERE - DESCRIPTION:

BQF-SMF: Difuzor cu perforații, cu miez detașabil, cu filtru - Perforated face diffuser with removable core and with filter

BQF-SM: Difuzor cu perforații, cu miez detașabil, fără filtru - Perforated face diffuser with removable core without filter

Ø 5 P8
gol/plin 35%
free area 35%

DESENE - DRAWINGS

CARACTERISTICI:

Difuzor pătrat cu perforații, cu posibilitate de inserare filtru, pentru plafon fals cu dimensiune casetă 595x595 mm.

CONSTRUCȚIE:

Ramă din AluminIU, panou perforat din oțel vopsit alb RAL 9010.

UTILIZARE:

Pentru montaj la tavan, pentru evacuare aer.
Înălțime montaj: 2,5-4,0 m

MONTAJ:

Clipsuri (șuruburi frontale la cerere).

ACCESORII:

Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată.

CHARACTERISTICS:

Perforated face square diffusers predisposed for filter insertion, for false ceiling, 595x595 mm overall size.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010.

UTILIZATION:






For ceiling installation for air return.
Installation height: 2,5-4,0 m

FIXING:

Clips (frontal screws on request).

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet.

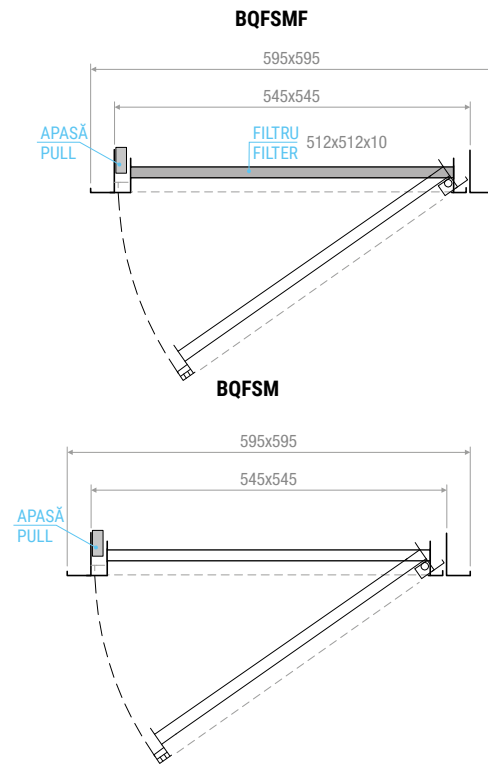

Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A_k [m ²]	Q [m ³ /h]		L_{wa} [dB(A)]		$X_{(0,25)}-Y_{(0,25)}$ [m]		Dpt [Pa]	
		min	max	min	max	min	max	min	max
BQFSM	0,1239	380	1080	37	63	3,5	7,9	10	50
BQFSMF	0,1239	380	1080	< 20	47	-	-	20	70

DESENE - DRAWINGS

