


PREȚURI - PRICES

	
	€
BQM3	


DESENE - DRAWINGS

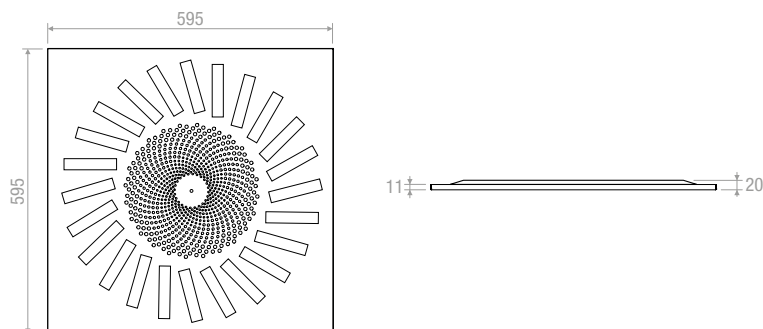

PREȚURI - PRICES PLENUM

	Racord Spigot							
AxB		PQZ1	PQZ11	PQZ2	PQZ12	Registru Damper	Egalizator Equalizer	Punte fixare Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
595x595	248							

DESENE - DRAWINGS

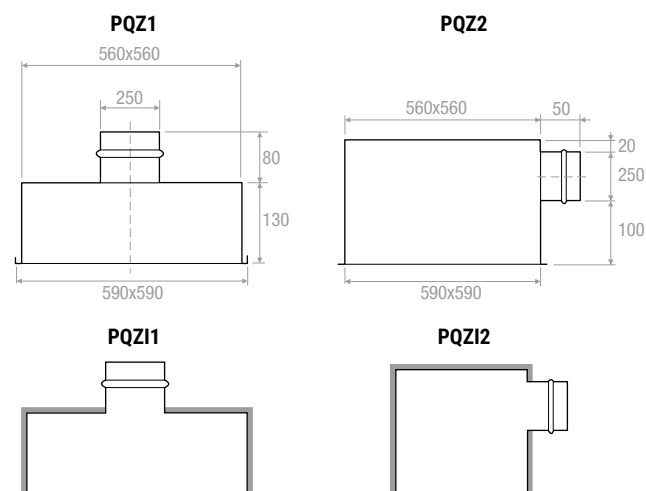


Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A_k [m²]	Q [m³/h]		L_{wa} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQM3	0,0283	270	520	30	48	3,2	4,3	10	50

BQM3



CARACTERISTICI:

Difuzoare cu jet turbionar cu lamele orientabile.

CONSTRUCȚIE:

Panou din oțel vopsit alb RAL 9010, lamelele de deflexie din polipropilenă de culoare neagră RAL 9005.

UTILIZARE:

Pentru montaj la tavan, pentru evacuare aer (fără deflectoare) și introducere. Înălțime montaj: 2,5-4,1 m.

MONTAJ:

Montare prin șuruburi laterale sau șurub central pe puntea de fixare.

ACCESORII:

Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată, registru de reglaj și punte fixare.

CHARACTERISTICS:

Swirl mixed diffusers with adjustable throws.

CONSTRUCTION:

RAL 9010 white painted steel, deflection blades are made of polypropylene RAL 9005 black.

UTILIZATION:

For ceiling installation and for air intake (without deflectors) and delivery. Installation height: 2,5-4,1 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.