

**CARACTERISTICI:**

Difuzoare cu jet turbionar.

CONSTRUCȚIE:

Oțel vopsit alb RAL 9010.

UTILIZARE:

Pentru instalare în plafon, pentru introducere și evacuare. Înălțime montaj: BQS = 2,6-4,0 m.

MONTAJ:

Montare prin șuruburi laterale sau șurub central pe puntea de fixare.

ACCESORII:

Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată, registru de reglaj și punte fixare.

CHARACTERISTICS:

Swirl diffusers.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation and for air intake and delivery. Installation height: BQS = 2,6-4,0 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.


ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.


PREȚURI - PRICES

STOC

	BQS	BQSC	
mm	€	€	PREȚURI - PIECES
600			5
625			5

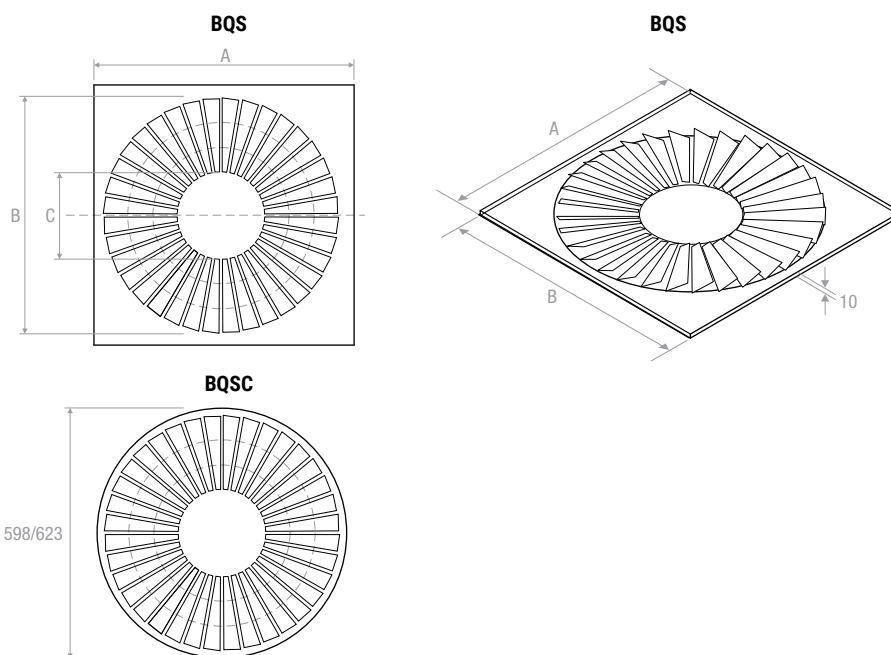DESENE - DRAWINGS**PREȚURI - PRICES PLENUM**

	Racord Spigot							
AxB		PQZ1	PQZ11	PQZ2	PQZ12	Registru Damper	Egalizator Equalizer	Punte fixare Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
600	248							
625	298							

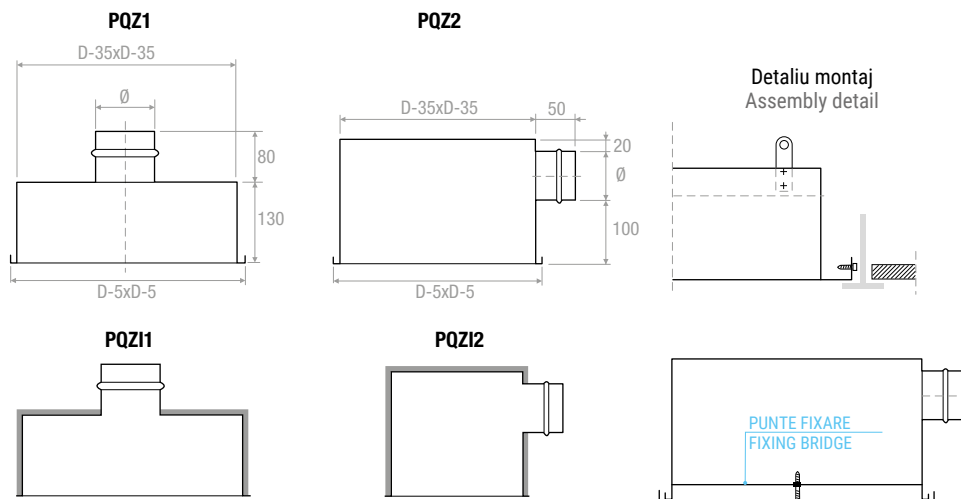
DESENE - DRAWINGS

Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm


PREȚURI - PRICES PLENUM BQSC

	Plenum galvanizat - Galvanized plenum			PDCQ	PDCQI	Registru Damper	Egalizator Equalizer	Punte fixare Fixing bridge
	AxA	ØD	ØE					
mm	mm	mm	mm	€	€	€	€	€
598	700	248	590					
623	700	298	615					

DESENE - DRAWINGS

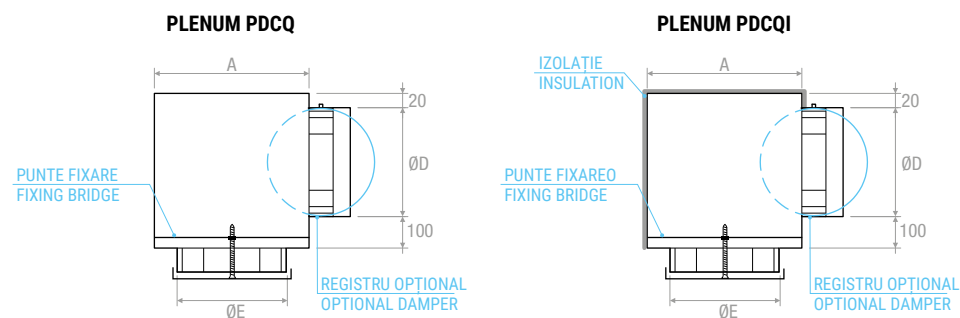

DIAGRAMĂ SELECȚIE RAPIDĂ - QUICK SELECTION DIAGRAM

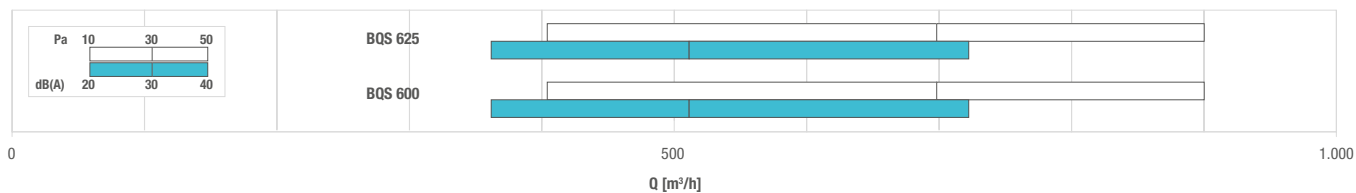

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A_k [m²]	Q [m³/h]		L_{wa} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQS 600	0,0368	400	900	23	46	3,3	7,4	10	50
BQS 625	0,0368	400	900	23	46	3,3	7,4	10	50