

BQSN



CARACTERISTICI:

Difuzoare cu jet turbionar.

CONSTRUCȚIE:

Oțel vopsit alb RAL 9010.

UTILIZARE:

Pentru instalare în plafon, pentru introducere și evacuare. Înălțime montaj: BQSN = 2,7-3,6 m.

MONTAJ:

Montare prin șuruburi laterale sau șurub central pe puntea de fixare.

ACCESORII:

Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată, registru de reglaj și punte de fixare.

CHARACTERISTICS:

Swirl diffusers.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation and for air intake and delivery. Installation height: BQSN = 2,7-3,6 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

PREȚURI - PRICES

STOC

				
	BQSN		BQSN	
mm	€	PREȚURI - PIECES	€	PREȚURI - PIECES
600		5		3
625		5		3


DESCRIERE: - DESCRIPTION:

BQSN: Difuzor cu jet turbionar - Swirl diffuser


BQSN: Difuzor circular cu jet turbionar - Circular swirl diffuser

DESENE - DRAWINGS

BQSN

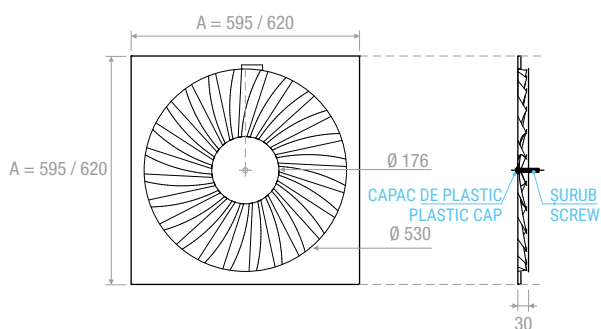


BQSN

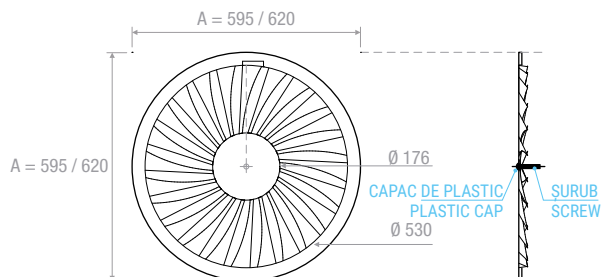


PREȚURI - PRICES PLENUM

	Racord Spigot							
		PQZ1	PQZ11	PQZ2	PQZ12	Registru Damper	Egalizator Equalizer	Punte fixare Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
600	248							
625	298							

DESENE - DRAWINGS

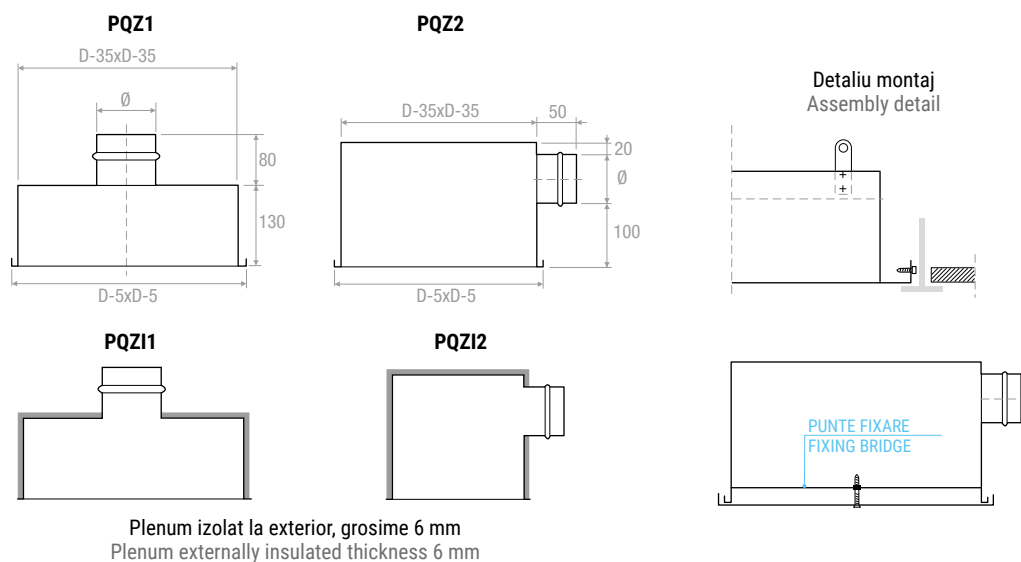

DIAGRAMĂ SELECȚIE RAPIDĂ - QUICK SELECTION DIAGRAM

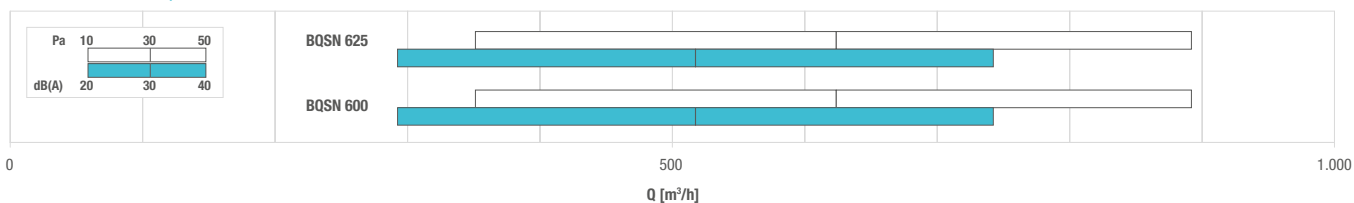

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A _s [m²]	Q [m³/h]		L _{wa} [dB(A)]		X _(0,20) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQSN 600	0,0365	350	810	23	43	3,2	7,3	10	50
BQSN 625	0,0365	350	810	23	43	3,2	7,3	10	50