


PREȚURI - PRICES

					
Model Model	DIC2	PQZ2	PQZI2	Registru Damper	Egalizator Equalizer
	€	€	€	€	€
DIC2 125					
DIC2 160					
DIC2 200					
DIC2 250					


DESENE - DRAWINGS

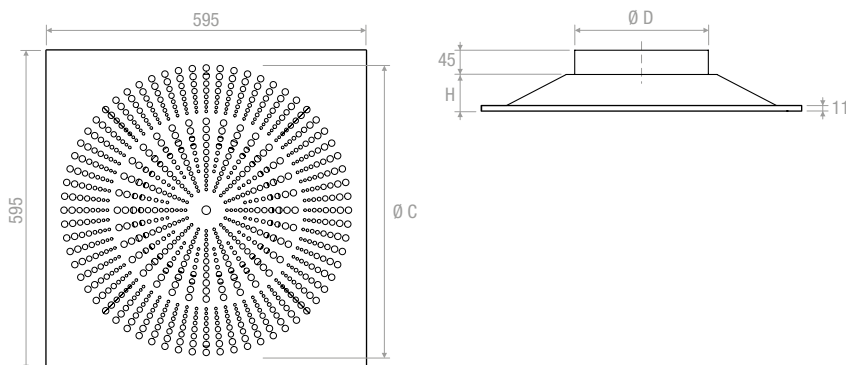

DIMENSIUNI - MEASURES

Tip - Type	C (mm)	D (mm)	H (mm)
125	314	123	45
160	384	157	55
200	462	197	68
250	540	247	68


DESENE - DRAWINGS

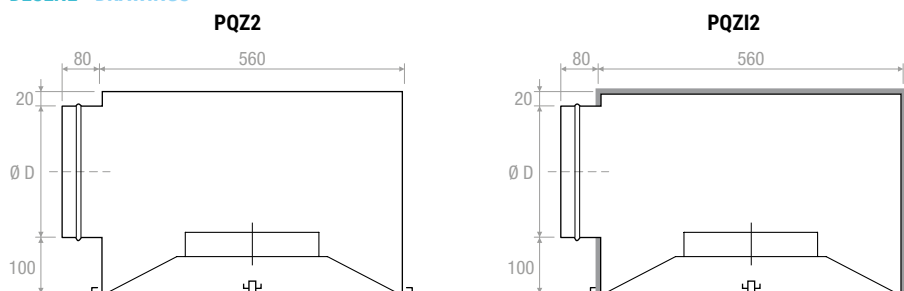

TABEL SELECȚIE - SELECTION TABLE

Model - Model	P [m³/h]		L _{WA} [dB(A)]		X _{0,20} [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
DIC2 125	55	90	25	40	0,2	0,4	20	40
DIC2 160	100	170	25	40	1,8	2,5	20	40
DIC2 200	210	270	25	40	2,1	3,3	20	40
DIC2 250	270	340	25	40	1,9	2,6	20	40

DIC2



CARACTERISTICI:

Difuzor cu placă patrată, cu efect de inducție pronunțat.

CONSTRUCȚIE:

Oțel vopsit alb RAL 9010.

UTILIZARE:

Instalare la tavan, pentru introducere.
Înălțime montaj: 2,7-4,1 m.

MONTAJ:

Montare prin șuruburi laterale sau șurub central pe puntea de fixare.

ACCESORII:

Plenum din oțel galvanizat, standard sau izolat termic, cu sau fără placă perforată, registru de reglaj și punte fixare.

CHARACTERISTICS:

Panel diffuser pulse type with high inductive capacity.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation supply operation.
Installation height: 2,7-4,1 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.