

GRA60SMF

GRI



CARACTERISTICI:

Grilă de evacuare portfiltru 595x595 mm (bare înclinate la 45°). Miez detaşabil pentru inserare filtru sau înlocuire.

CONSTRUCȚIE:

Aluminiu anodizat.

UTILIZARE:

Montaj în perete/tavan, pentru evacuare aer.

MONTAJ:

Prin clipsare (șuruburi frontale obligatorii pentru montaj la plafon).

ÎNCHIDERE:

Prin sistem push/pull.

CHARACTERISTICS:

Return filter grille 595x595 mm (bars inclined 45°). Removable core for filter insertion and removal.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wale/ceiling installation and for air intake.

FIXING:

By clips
(frontal screws on request mandatory for ceiling installation).

CLOSING:

By push/pull.

PREȚURI - PRICES

STOC

	CU FILTRU WITH FILTER							
BxH	GRA60SMF	GRA60SM	FILTRO - FILTER	SC	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								

VOPSEA - PAINTING:

Culoare RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%





Culori diferite: prețuri la cerere - Different colors: prices on request

DESCRIERI - DESCRIPTIONS:


GRA60SMF: Grilă de evacuare portfiltru 595x595 mm (bare înclinate la 45°) cu filtru - Return filter grille 595x595 mm (bars inclined 45°) with filter

GRA60SM: Grilă evacuare portfiltru (bare înclinate la 45°) fără filtru - Return filter grille (bars inclined 45°) without filter

DESENE - DRAWINGS

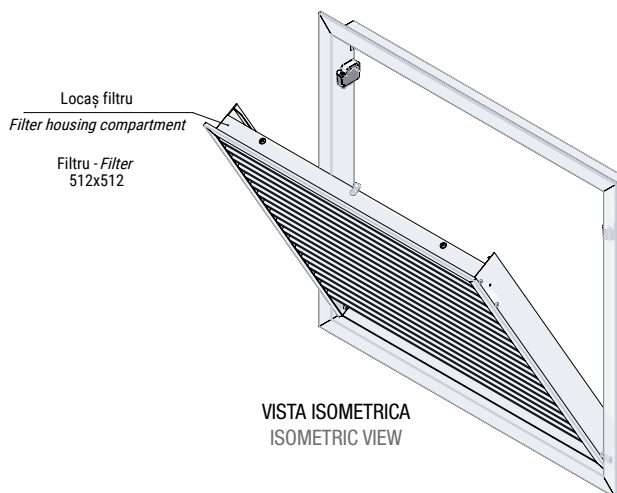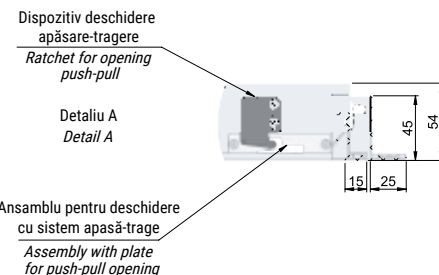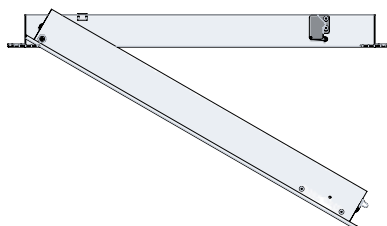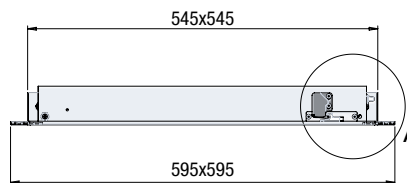

DESENE - DRAWINGS

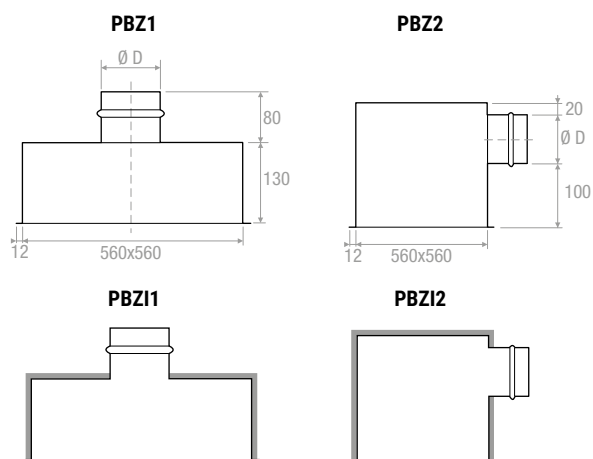

Plenum izolat la exterior, grosime 6 mm
Plenum externally insulated thickness 6 mm

TABEL SELECȚIE - SELECTION TABLE

Model - Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		Dp_t [Pa]	
		min	max	min	max	min	max
GRA60SM	0,1957	910	2230	24	41	5	30
GRA60SMF	0,1957	510	1760	-	34	10	50