

**CARACTERISTICI:**

Duză de introducere aer, cu bătaie lungă a jetului de aer, cu unghi maxim de înclinare de 30°.

CONSTRUCȚIE:

Aluminiu satinizat cu protecție transparentă.

UTILIZARE:

Montaj la plafon sau pe perete, pentru introducere.
Înălțime montaj: 2,4-11,5 m.

MONTAJ:

Fixare prin șurub frontal montat pe inelul difuzorului, sau conexiune directă în tub.

ACCESORII:

Conector pentru tub circular.
CV: inel ascundere șuruburi.

CHARACTERISTICS:

Jet diffusers for long throw with orientable nozzle for a maximum angle of 30°.

CONSTRUCTION:

Naturale satinized aluminium with transparent primer.

UTILIZATION:

For ceiling or wall installation and for air delivery.
Installation height: 2,4-11,5 m.

FIXING:

Fixing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.

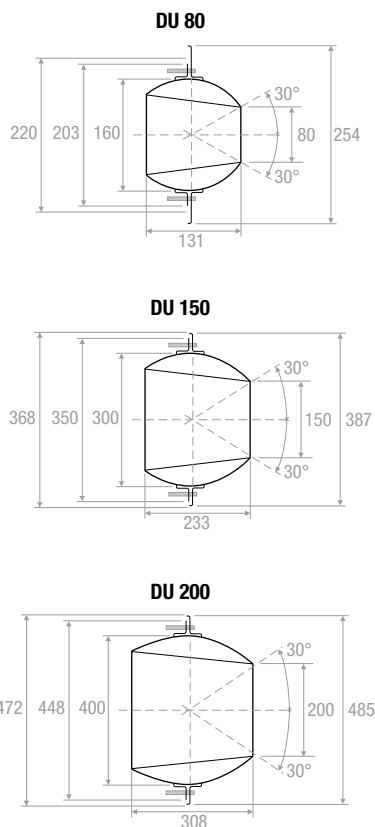




ACCESSORIES:

Connector for circular duct.
CV: cover screws.

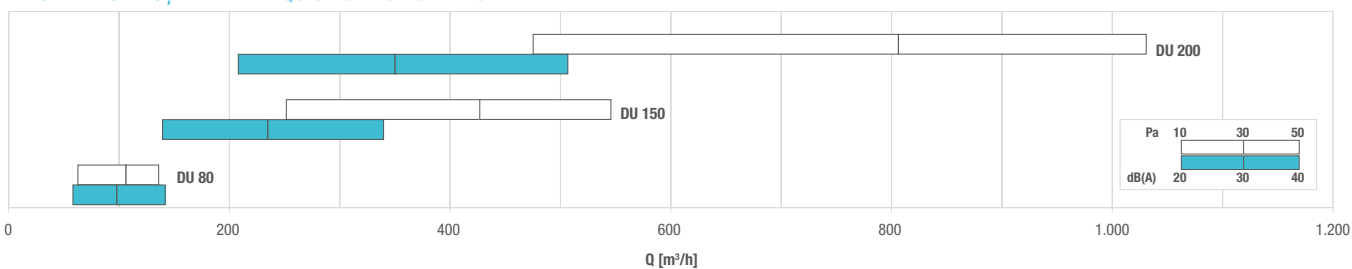
PREȚURI - PRICES

STOC

	DU	CV	
mm	€	€	BUCAȚI - PIECES
DU 80			120
DU 150			28
DU 200			16

DESENE - DRAWINGS**Montaj în tubulatură**
Mounting on the duct**Montaj în tubulatură circulară**
Mounting on the circular duct**Montaj prin racord flexibil**
Mounting by flexible duct**Montaj în baterie**
Mounting in battery**DIMENSIUNI - MEASURES**

Model - Model	A	F	I
DU 80	200	207	300
DU 150	300	354	430
DU 200	350	452	430

DIAGRAMĂ SELECȚIE RAPIDĂ - QUICK SELECTION DIAGRAM**TABEL SELECȚIE - SELECTION TABLE**

Modello - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		D _p [Pa]	
		min	max	min	max	min	max	min	max
DU 80	0,0050	60	140	20	40	8,1	18,9	10	50
DU 150	0,0176	250	550	31	58	11,9	26,2	10	50
DU 200	0,0314	480	1030	38	69	14,0	30,1	10	50