


SPG

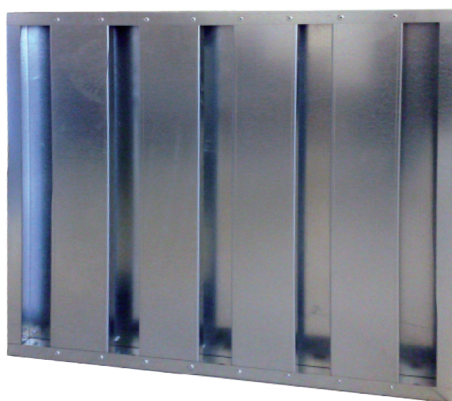

Caractéristiques : grilles anti-sable pour aspiration d'air dans des environnements particulièrement poussiéreux.

Construction : cadre muni dans la partie inférieure de trous pour l'évacuation de la poussière et double rangée d'aillettes en C placées verticalement en opposition. Construction en tôle galvanisée, acier inox, aluminium ou autre matériau sur demande.

Utilisation : aspiration d'air et première étape de filtration grossière en utilisant le principe de la séparation par inertie. Température de fonctionnement maximale 200°C, pression de fonctionnement maximale 1000 pa.

Fixation : au moyen de vis autoforeuses sur cadre ou sur demande avec des supports à maçonner.

Characteristics: sand-proof grilles for air intake in dusty environments.

Finishing: frame provided at the bottom of holes for the discharge of the sand and two rows of C ns placed vertically in opposition. Construction in galvanized sheet metal, stainless steel, aluminium or other material on request.


Utilization: air intake and the first stage of coarse filtration using the principle of inertial separation. Maximum operating temperature 200 ° C, operating pressure up to 1000 pa.

Performances: by means of self-tapping screws on the frame or on request with brackets to wall.

MODÈLES | MODELS

SPGF	Doté d'un filtre plan épaisseur 23 mm et grillage anti-volatiles Complete of flat filter thickness 23 mm and bird mesh
-------------	---

DESSINS | DRAWINGS

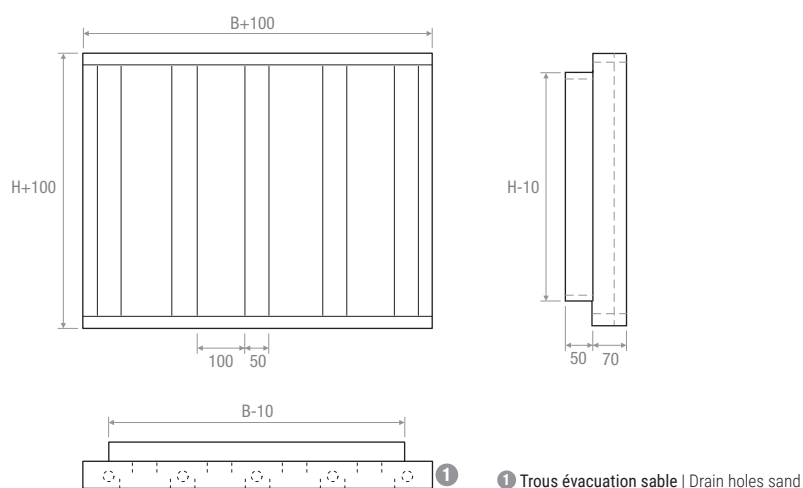


PERTE DE CHARGE CÔTÉ AIR | AIR PRESSURE DROP

SPG						
Vitesse de face Front speed	[m/s]	0,5	1	1,5	2	2,5
Pertes de charge Pressure drop	[Pa]	9	32	67	114	172

SPGF						
Vitesse de face Front speed	[m/s]	0,5	1	1,5	2	2,5
Pertes en aspiration Pressure drops in suction	[Pa]	65	97	146	218	327

GRAPHIQUE DE SÉLECTION | SELECTION DIAGRAM

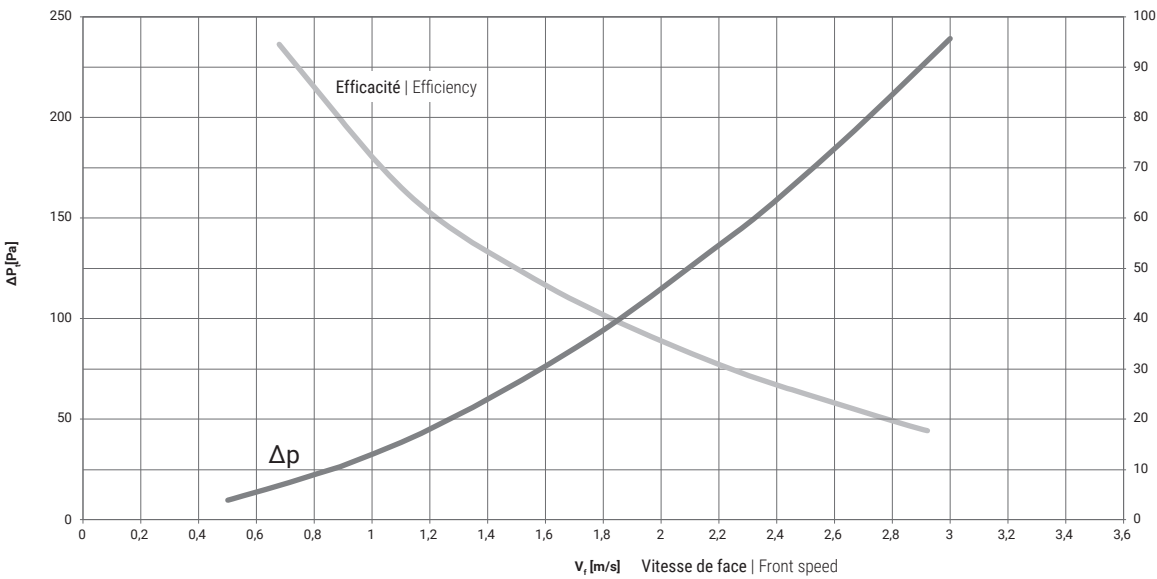

PRIX | PRICES

	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
300													
400													
500													
600													
700													
800													
900													
1000													
1100													
1200													
1300													
1400													
1500													
1600													
1700													
1800													
1900													
2000													

Prix sur demande
Prices on demand