


BQF

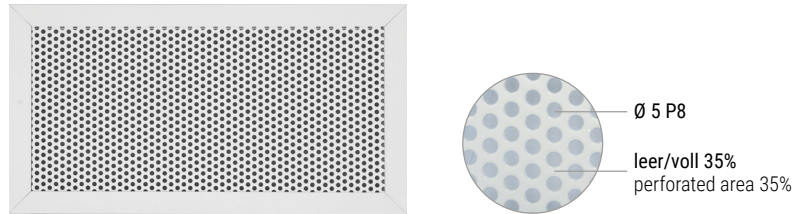

Eigenschaften: Abluftgitter mit gelochtem Frontdurchlass.

Konstruktion: Rahmen aus matt, weiß RAL 9016 lackiertem Aluminium. Frontdurchlass aus matt, weiß RAL 9016 lackiertem Stahlblech.

Verwendung: an der Wand, in Abluft.

Befestigung: mit Clips oder auf Anfrage mit frontalen Schraubenbohrungen.

Zubehöre:

- Luftverteilerkasten aus verzinktem Stahl: mit oder ohne Isolierung.
- Mengeregulierung aus verzinktem Stahl mit Lamellen mit gegenläufigem Betrieb.
- Einbaurahmen aus verzinktem Stahl.

Characteristics: perforated return air grilles.

Finishing: frame made of RAL 9016 white matt painted aluminium. Panel made of RAL 9016 white matt painted steel.

Utilization: for wall installation and for air intake.

Fixing: by using clips or through hole on demand.


Accessories:

- Galvanized steel plenum: With or without insulation.
- Calibration damper made of galvanized steel and opposed blades.
- Mounting frames made of galvanized steel sheet.

LACKIERUNG | PAINTING


Farben RAL 9010 glänzend: + 15 %. Für weitere Maße und RAL Preise auf Anfrage
Color RAL 9010 glossy: + 15%. Other sizes and RAL colors: prices on request

ZEICHNUNGEN | DRAWINGS

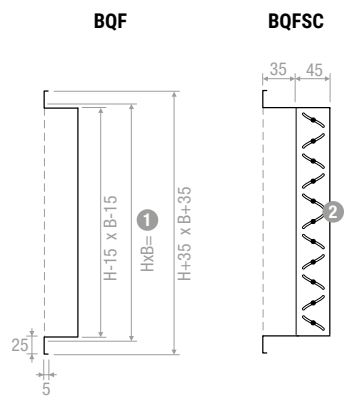

- ① Lochabmessungen | Hole dimension
 ② Mengeregulierung | Opposed blade damper

LUFTVERTEILERKASTEN | PLENUM

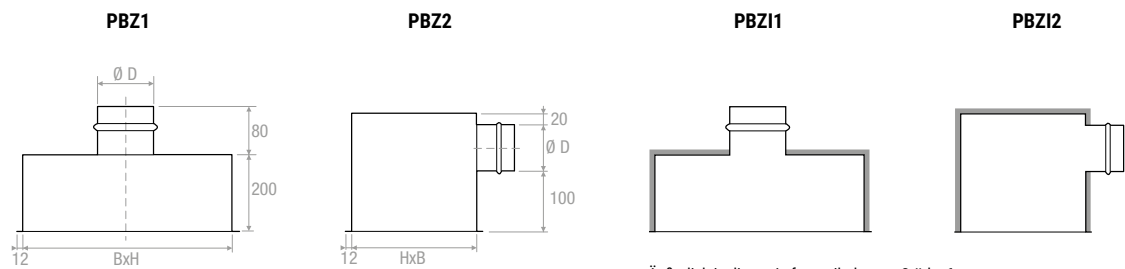

Äußerlich isolierter Luftverteilerkasten Stärke 6 mm
 Plenum externally insulated thickness 6 mm

AUSWAHLTABELLE | TECHNICAL DATA

Modell Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
BQF 200x200	0,0136	60	130	-	21	10	50
BQF 300x200	0,0204	80	190	-	22	10	50
BQF 400x200	0,0272	110	260	-	23	10	50
BQF 500x200	0,034	140	320	-	23	10	50
BQF 600x200	0,0408	170	380	-	25	10	50
BQF 800x200	0,0544	230	510	-	25	10	50
BQF 1000x200	0,068	280	640	-	26	10	50
BQF 300x300	0,0305	120	260	-	21	10	50
BQF 400x300	0,0422	160	360	-	22	10	50
BQF 500x300	0,0543	200	460	-	23	10	50
BQF 600x300	0,0668	250	560	-	23	10	50
BQF 800x300	0,0924	350	780	-	25	10	50
BQF 1000x300	0,1190	450	1000	-	26	10	50
BQF 400x400	0,0584	220	490	-	23	10	50
BQF 500x400	0,0752	280	630	-	24	10	50
BQF 600x400	0,0924	350	780	-	25	10	50
BQF 800x400	0,1280	480	1070	-	26	10	50
BQF 1000x400	0,1647	620	1380	-	27	10	50
BQF 500x500	0,0968	360	810	-	25	10	50
BQF 600x500	0,1190	450	1000	-	26	10	50
BQF 800x500	0,1647	620	1380	-	27	10	50
BQF 1000x500	0,2120	790	1770	-	28	10	50
BQF 600x600	0,1462	550	1220	-	26	10	50
BQF 800x600	0,2025	760	1690	-	27	10	50
BQF 1000x600	0,2606	980	2180	-	28	10	50



PREISE | PRICES

							
BxH	BQF	SC	CT	PBZ1	PBZ11	PBZ2	PBZI2
mm	€	€	€	€	€	€	€
200x200							
300x200							
400x200							
500x200							
600x200							
800x200							
1000x200							
300x300							
400x300							
500x300							
600x300							
800x300							
1000x300							
400x400							
500x400							
600x400							
800x400							
1000x400							
500x500							
600x500							
800x500							
1000x500							
600x600							
800x600							
1000x600							