



## CFCRC

---

**Caratteristiche:** diffusori circolari a coni fissi con corpo centrale asportabile e serranda a farfalla.

**Costruzione:** alluminio verniciato bianco RAL 9016 opaco e guarnizione di tenuta.

**Impiego:** a soffitto, in mandata o ripresa. Altezza di installazione: 2,6-4,1 m

**Fissaggio:** a viti nascoste posizionate sul collo del diffusore o con ponte di montaggio.

**Accessori:**

- Collare di fissaggio (CF).
- Pannello 595x595 (CFP).

**Characteristics:** circular diffusers with fixed cones and removable core and butterfly damper.

**Finishing:** aluminium painted in matt white RAL 9016, with sealing gasket.


**Utilization:** for ceiling installation, for return or supply air application. Installation height: 2,6-4,1 m.

**Fixing:** by concealed fixing screws mounted on the diffuser neck or with mounting bridge.

**Accessories:**

- Fixing ring (CF).
- Panel 595x595 (CFP).

## DISEGNI | DRAWINGS

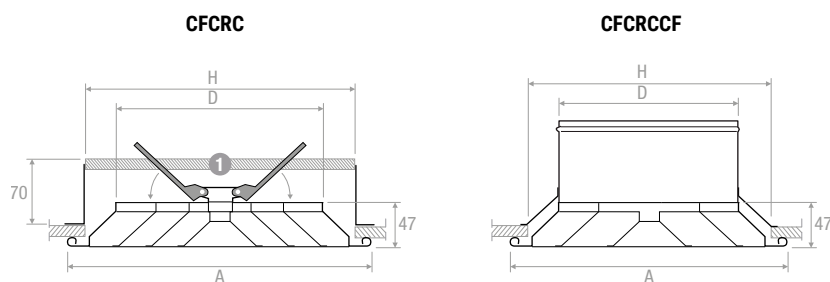

1 Ponte di fissaggio | Mounting bridge

| Dimensioni   Dimension | H   | D   | A   |
|------------------------|-----|-----|-----|
| mm                     | mm  | mm  | mm  |
| <b>150</b>             | 220 | 148 | 257 |
| <b>200</b>             | 276 | 198 | 309 |
| <b>250</b>             | 324 | 249 | 362 |
| <b>300</b>             | 377 | 298 | 415 |
| <b>350</b>             | 411 | 348 | 460 |

## ACCESSORI | ACCESSORIES

Collarino di fissaggio | Fixing ring

CF




Policarbonato  
Polycarbonate  
Ø 150  
Ø 200  
Ø 250



Acciaio  
Steel  
Ø 300  
Ø 350

CFCRC

MONTAGGIO | MOUNTING

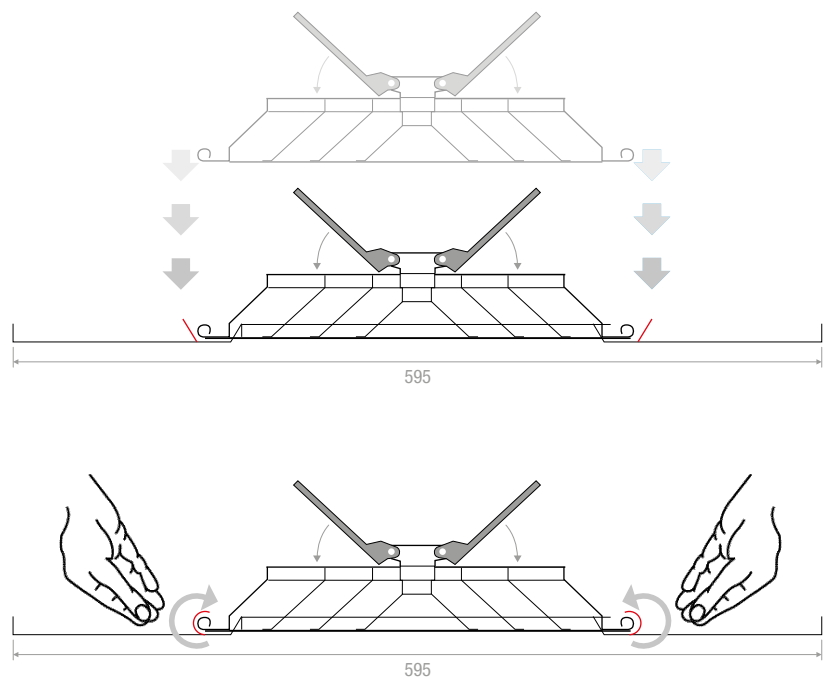

CFCRC+CFP VERSIONE SU PANNELLO | PANEL VERSION




TABELLA DI SELEZIONE | TECHNICAL DATA

| Modello   Model | $A_k$ [m <sup>2</sup> ] | Q [m <sup>3</sup> /h] |      | $L_{WA}$ [dB(A)] |     | $X_{(0,25)} - Y_{(0,25)}$ [m] |     | $Dp_t$ [Pa] |     |
|-----------------|-------------------------|-----------------------|------|------------------|-----|-------------------------------|-----|-------------|-----|
|                 |                         | min                   | max  | min              | max | min                           | max | min         | max |
| CFCRC 150       | 0,0102                  | 90                    | 220  | -                | 38  | 1,0                           | 2,1 | 10          | 50  |
| CFCRC 200       | 0,0227                  | 200                   | 490  | -                | 38  | 1,5                           | 3,2 | 10          | 50  |
| CFCRC 250       | 0,0366                  | 330                   | 790  | -                | 39  | 1,9                           | 4,2 | 10          | 50  |
| CFCRC 300       | 0,0519                  | 470                   | 1120 | -                | 39  | 2,2                           | 5,1 | 10          | 50  |
| CFCRC 350       | 0,0684                  | 620                   | 1470 | -                | 40  | 2,6                           | 6,0 | 10          | 50  |

## VERSIONI DISPONIBILI | VERSIONS AVAILABLE

stock

|  |                |  |  |     |  |  |
|-----------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------|--|
| Ø                                                                                 | CFCRC          | Box                                                                               | CF Coll. di fiss.   Fixing ring                                                   | CFP | Box                                                                                 |  |
| mm                                                                                | Pezzi   Pieces |                                                                                   | Pezzi   Pieces                                                                    |     |                                                                                     |  |
| 150                                                                               |                | 4                                                                                 |                                                                                   |     | 10                                                                                  |  |
| 200                                                                               |                | 4                                                                                 |                                                                                   |     | 10                                                                                  |  |
| 250                                                                               |                | 4                                                                                 |                                                                                   |     | 10                                                                                  |  |
| 300                                                                               |                | 4                                                                                 |                                                                                   | -   | -                                                                                   |  |
| 350                                                                               |                | 4                                                                                 |                                                                                   | -   | -                                                                                   |  |