


GUR

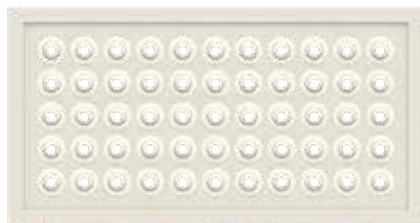

Caratteristiche: diffusori a micro ugelli orientabili su pannello rettangolare.

Costruzione: piastra in acciaio, cornice in alluminio, ugelli in nylon bianco. Finitura: bianco RAL 9016 opaco.

Fissaggio: installazione mediante clips (con fori per viti a richiesta).

Accessori:

- Plenum in acciaio zincato:
 - Con o senza isolamento.
 - Con o senza equalizzatore.
- Serranda di taratura in acciaio zincato con alette a funzionamento contrapposto.
- Controtelaio di montaggio in acciaio zincato.

Characteristics: diffusers with adjustable micro nozzles arranged on a rectangular panel.


Finishing: steel plate, aluminium frame, white nylon nozzles. Finish: white RAL 9016 matt.

Fixing: by using clips (through hole on request).

Accessories:

- Galvanized steel plenum box:
 - With or without insulation.
 - With or without air equalizer.
- Calibration damper made of galvanized steel with opposed blades.
- Mounting frames made of galvanized steel sheet.

DISEGNI | DRAWINGS

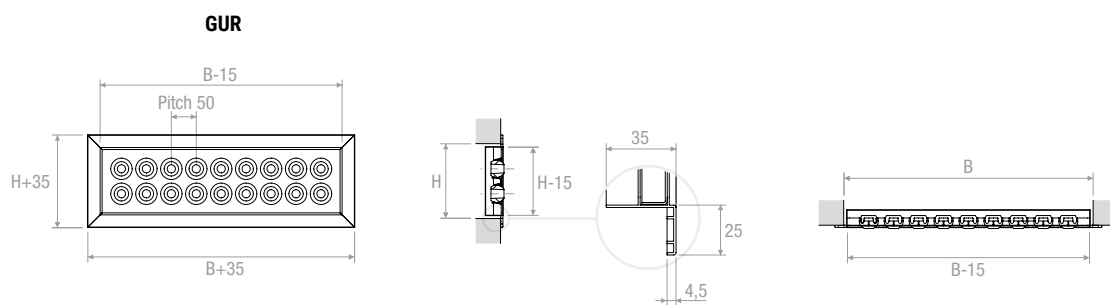

PLENUM | PLENUM


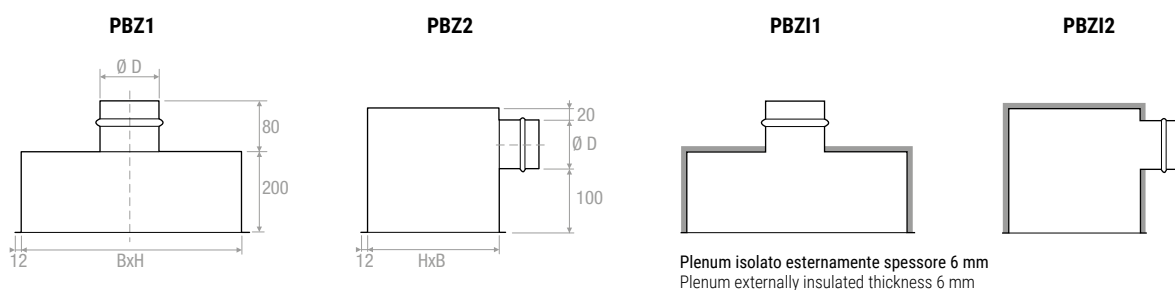


TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	Q [m ³ /h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
200x100	5	25	21	29	1,7	6,7	5	55
300x100	10	40	21	29	1,7	6,7	5	55
400x100	15	55	21	29	1,7	6,7	5	55
500x100	20	70	21	29	1,7	6,7	5	55
600x100	25	85	21	29	1,7	6,7	5	55
700x100	30	100	21	29	1,7	6,7	5	55
800x100	35	115	21	29	1,7	6,7	5	55
1000x100	45	145	21	29	1,7	6,7	5	55
1200x100	55	175	21	29	1,7	6,7	5	55
300x150	25	75	23	32	1,9	6,9	5	55
400x150	30	110	23	32	1,9	6,9	5	55
500x150	40	140	23	32	1,9	6,9	5	55
600x150	50	170	23	32	1,9	6,9	5	55
700x150	60	200	23	32	1,9	6,9	5	55
800x150	70	230	23	32	1,9	6,9	5	55
1000x150	90	290	23	32	1,9	6,9	5	55
1200x150	105	355	23	32	1,9	6,9	5	55
300x200	35	115	25	34	2,1	7,3	5	55
400x200	50	160	25	34	2,1	7,3	5	55
500x200	60	205	25	34	2,1	7,3	5	55
600x200	75	255	25	34	2,1	7,3	5	55
700x200	90	300	25	34	2,1	7,3	5	55
800x200	105	345	25	34	2,1	7,3	5	55
1000x200	130	440	25	34	2,1	7,3	5	55
1200x200	160	530	25	34	2,1	7,3	5	55
400x250	65	215	27	36	2,4	7,7	5	55
500x250	85	275	27	36	2,4	7,7	5	55
600x250	100	340	27	36	2,4	7,7	5	55
700x250	120	400	27	36	2,4	7,7	5	55
800x250	140	460	27	36	2,4	7,7	5	55
1000x250	175	585	27	36	2,4	7,7	5	55
1200x250	210	705	27	36	2,4	7,7	5	55
500x300	105	345	29	38	2,6	7,9	5	55
600x300	125	425	29	38	2,6	7,9	5	55
700x300	150	500	29	38	2,6	7,9	5	55
800x300	175	575	29	38	2,6	7,9	5	55
1000x300	220	730	29	38	2,6	7,9	5	55
1200x300	265	885	29	38	2,6	7,9	5	55

VERSIONI DISPONIBILI | VERSIONS AVAILABLE



BxH	Ugelli per diffusore Nozzles for diffuser	File ugelli Nozzle file	GUR	SC	CT	PBZ1	PBZ11	PBZ2	PBZ12
mm	N°	N°							
200x100	3	1							
300x100	5	1							
400x100	7	1							
500x100	9	1							
600x100	11	1							
700x100	13	1							
800x100	15	1							
1000x100	19	1							
1200x100	23	1							
300x150	10	2							
400x150	14	2							
500x150	18	2							
600x150	22	2							
700x150	26	2							
800x150	30	2							
1000x150	38	2							
1200x150	46	2							
300x200	15	3							
400x200	21	3							
500x200	27	3							
600x200	33	3							
700x200	39	3							
800x200	45	3							
1000x200	57	3							
1200x200	69	3							
400x250	28	4							
500x250	36	4							
600x250	44	4							
700x250	52	4							
800x250	60	4							
1000x250	76	4							
1200x250	92	4							
500x300	45	5							
600x300	55	5							
700x300	65	5							
800x300	75	5							
1000x300	95	5							
1200x300	115	5							