

GRA60SMF

PRECIOS - PRICES

■ STOCK

	CON FILTRO WITH FILTER							
BxH	GRA60SMF	GRA60SM	FILTRO - FILTER	SC	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								





PINTURA - PAINTING:

Colores RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%
Otros colores: precios a petición - Different colors: prices on request

DESCRIPCIONES - DESCRIPTIONS:

GRA60SMF: Rejilla de retorno portafiltro 595x595 mm con lamas fijas de 45° con filtro incluido - Return filter grille 595x595 mm (bars inclined 45°) with filter
GRA60SM: Rejilla de retorno portafiltro con lamas fijas de 45° sin filtro - Return filter grille (bars inclined 45°) without filter

DIBUJOS - DRAWINGS

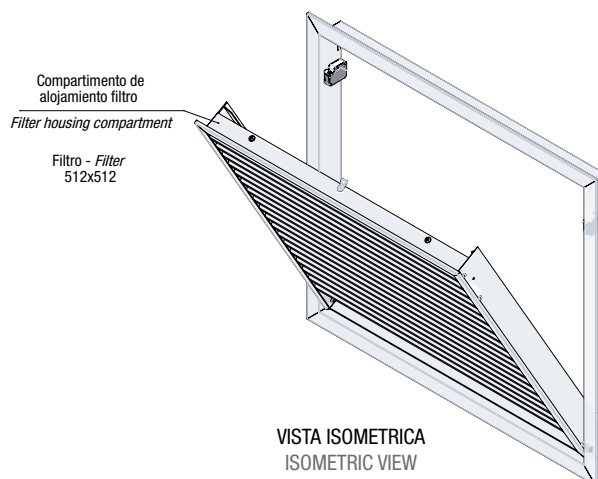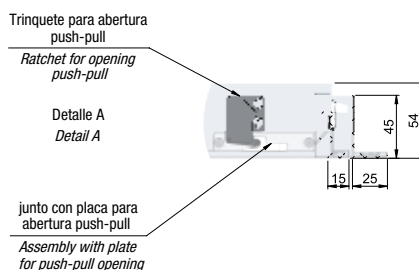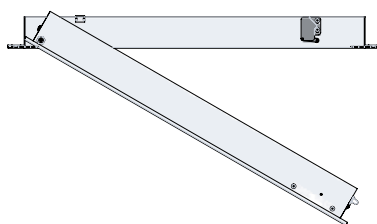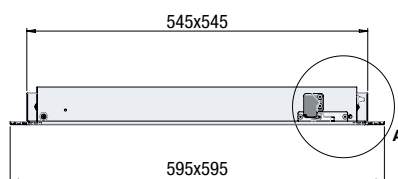

CARACTERÍSTICAS:

Rejilla de retorno portafiltro 595x595 mm con lamas fijas inclinadas de 45° para el alojamiento y la sustitución del filtro.

ESTRUCTURA:

Aluminio anodizado.

USO:

En pared/techo, para retorno.

FIJACIÓN:

Con clips (con tornillos bajo pedido y obligatorio para instalación en forjado)

CIERRE:

Con Push/Pull.

CHARACTERISTICS:

Return filter grille 595x595 mm (bars inclined 45°). Removable core for filter insertion and removal.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wale/ceiling installation and for air intake.


FIXING:

By clips
(frontal screws on request mandatory for ceiling installation).

CLOSING:

By push/pull.

DIBUJOS - DRAWINGS

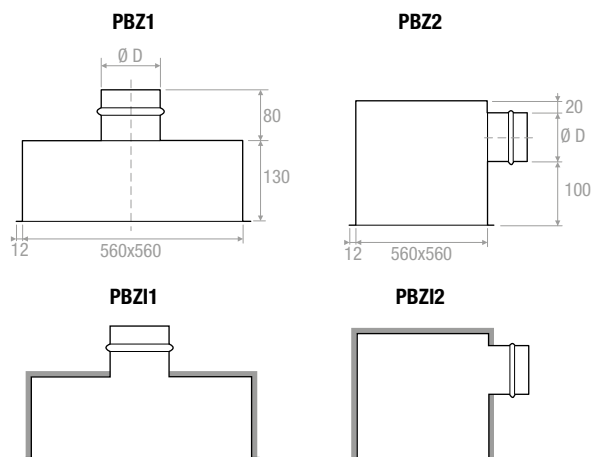

Plenum aislado externamente espesor 6 mm
Plenum externally insulated thickness 6 mm

TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		Dp_t [Pa]	
		min	max	min	max	min	max
GRA60SM	0,1957	910	2230	24	41	5	30
GRA60SMF	0,1957	510	1760	-	34	10	50